



2026 / US
PRODUCT GUIDE





RE-IMAGINE BEVERAGE EXCELLENCE EVERYWHERE

We design and manufacture innovative and energy-efficient beverage dispense solutions for the global hospitality, foodservice and speciality beverage industries.

We collaborate with our industry to re-imagine a sustainable future and create excellent beverage experiences everywhere.

CONTENTS

SUITABLE APPLICATIONS		1
BEVERAGE	POUR'D	3
DISPENSE	POUR'D TOUCH	5
	SYPP 4	7
COLD BREW/ CONCENTRATE	COLDBRU	9
MILK	MILKPAL	11
HOT/COLD/ SPARKLING/WATER	FRIIA C & FRIIA C HANDS-FREE	13
	FRIIA CS	14
	FRIIA HC	15
	FRIIA HCS	16
	FRIIA CHILLER/CARBONATOR	17
HOT WATER	UNDERCOUNTER BOILERS & FONTS	20
	MIX UC3, UC8	21
	1B UNA FONT WITH MIX UC3/MIX UC8	22
	3B MIX FONT WITH MIX UC3/MIX UC8	23
	COUNTERTOP PUSH BUTTON	25
	MIX PB3, PB8	26
	COUNTERTOP TAP	27
	MT4, MT8, MT25	28
COFFEE	JET, JET TWIN, JET GRINDER	30
	SP9 SINGLE, SP9 TWIN	31
CONTACT DETAILS		33



OUR BUSINESS IS B CORP CERTIFIED.

This certification solidifies Marco's purpose to "re-imagine beverage excellence everywhere".

WHAT'S B CORP?

B Corp is a globally recognised assessment that measures a company's entire social and environmental impact. Companies that achieve B Corp certification are committed to being a force for good by balancing purpose and profit.

B Corp matters to Marco because it aligns with our vision of:

A HEALTHY WORLD WHERE EVERY DRINK EXCEEDS EXPECTATIONS.

We want Marco to be a force for good in this world, and we want our customers, communities, and employees to feel proud to work at, and do business with Marco.



SUITABLE APPLICATIONS



CAFE/
COFFEE
SHOP



QSR



HOTEL



OFFICE



CONVENIENCE/
FORECOURT



FOODSERVICE/
CATERING

BEVERAGE DISPENSE



POUR'D

Total beverage choice, on tap

- > POUR'D can be used to dispense beverages from any concentrate or syrup source.

**COMPLETE BUNDLE
ORDER CODE**

POUR'D Concentrate 3b
5001940C3B




POUR'D FONT
1000942



**POUR'D/
CONTROL BOX**
1001944US



POUR'D SET-UP

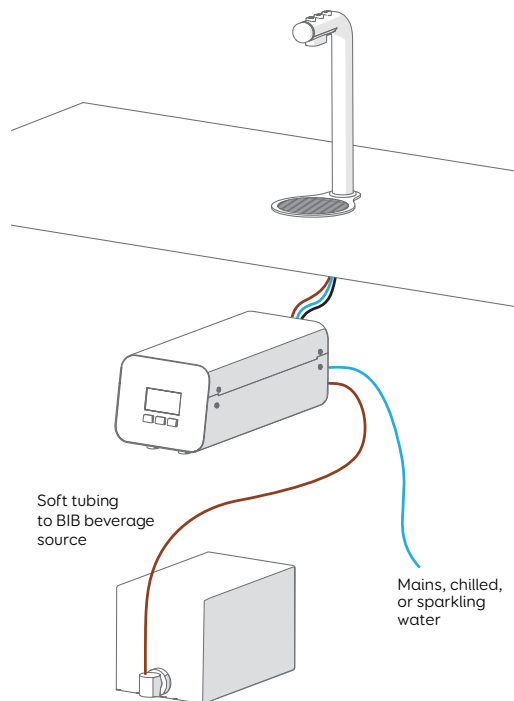

**RECOMMENDED
DILUTION RATIOS**



5:1
Hot



1:1 - 30:1
Cold/Sparkling

GOOD TO KNOW

POUR'D can be used with:
Concentrates & Syrups with Max Viscosity of 700 CPS

Minimum 4ml concentrate to 125ml final beverage

OPTIONAL

**BOILER
MIX UC3**



- > To dilute with hot water
- > To add separate hot water

**CHILLER / CARBONATOR
FRIIA**



- > To dilute with either chilled or sparkling water
- > To add separate chilled or sparkling water

POUR'D SPECS

	FONT	CONTROL BOX
	3B POUR'D FONT 1000942	POUR'D Control Box 1001944US
Dimensions (D x W x H inches)	6.6 x 4.9 x 11.8 (Incl. drip tray)	14.2 x 5.5 x 6.9 (width not including tubing)
Power	—	40W, 0.17A @ 110V
Plumbing	—	3/8" Compression or 3/8" push fit
Drain Required	Y	—
GAL/HR	—	33.3
Performance Specs	—	Dilution Range: 1:1 - 30:1

PACKAGING

ITEM	PACKAGING DIMENSIONS (L x W x H inches)	WEIGHT	QTY / PALLET
Font	12 x 23 x 9	5lb	54
Control Box	17 x 11 x 13	13lb	48/36 (sea/air freight)

POUR'D CAN DILUTE/DISPENSE:

Syrups	✓
Concentrates	✓
Juice (no pulp, <700 CPS)	✓
RTD Cold Drinks	✓

Dairy Milk	✗
Thick Syrup/Molasses (>700 CPS)	✗
Kombucha	✗
Powder	✗
RTD Hot Drinks	✗

POUR'D TOUCH

Beverage dispense made easy

- > POUR'D can be used to dispense beverages from any concentrate or syrup source.

**COMPLETE BUNDLE
ORDER CODE**

POUR'D TOUCH
5001945US




FONT
1000990



CONTROL BOX
1001945US



POUR'D TOUCH SET-UP

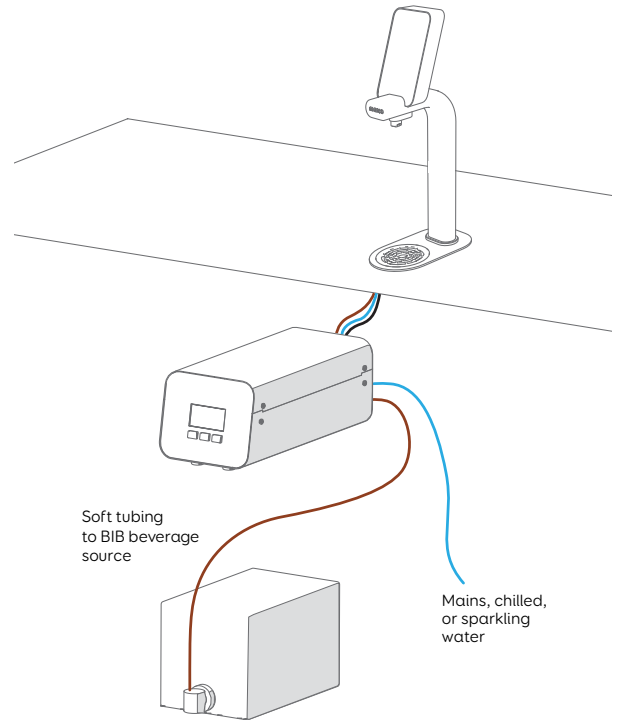

RECOMMENDED DILUTION RATIOS



5:1
Hot



1:1 - 30:1
Cold/Sparkling

GOOD TO KNOW

POUR'D TOUCH can be used with:
Concentrates & Syrups with Max Viscosity of 700 CPS

Minimum 4ml concentrate to 125ml final beverage

OPTIONAL

**BOILER
MIX UC3**



- > To dilute with hot water
- > To add separate hot water

**CHILLER / CARBONATOR
FRIIA**



- > To dilute with either chilled or sparkling water
- > To add separate chilled or sparkling water

POUR'D TOUCH SPECS

	FONT	CONTROL BOX
	POUR'D TOUCH Font 1000990	POUR'D TOUCH Control Box 1001945US
Dimensions (D x W x H inches)	7.69 x 4.68 x 11.87 (Incl. drip tray)	14.2 x 5.5 x 6.9 (width not including tubing)
Power	—	40W, 0.17A @ 110V
Plumbing	—	3/8" Compression or 3/8" push fit
Drain Required	Y	—
GAL/HR	—	33.3
Performance Specs	—	Dilution Range: 1:1 - 30:1

PACKAGING

ITEM	PACKAGING DIMENSIONS (L x W x H inches)	WEIGHT	QTY / PALLET
Font	32 x 13 x 8	5lb	54
Control Box	17 x 11 x 13	13lb	48/36 (sea/air freight)

BUNDLE

ITEM	CODE
Font and drip tray	5001945US
Control Box	

POUR'D TOUCH CAN DILUTE/DISPENSE:

Syrups	✓	Dairy Milk	✗
Concentrates	✓	Thick Syrup/Molasses (>700 CPS)	✗
Juice (no pulp, <700 CPS)	✓	Kombucha	✗
RTD Cold Drinks	✓	Powder	✗
		RTD Hot Drinks	✗

SYPP 4

Dispenses up to 8 flavours with hot/cold/sparkling water

- > Flexible menu creation
- > Accurate portion control
- > Reduced waste & increased profitability
- > Consistent and quick service
- > Connect between 4 to 8 syrups*
- > Compatible with FRIIA Chiller/Carbonator and MIX Boiler

SYPP HEAD 1000915



SET-UP




SYPP 4


BUNDLE CODE	ITEMS INCLUDED	
SYPP 4 5000915	SYPP Head	1000915
	SYPP Pump Box	1000910
TO SCALE TO 8 FLAVOURS		
ADD:	SYPP Pump Box	1000910
OPTIONAL	4 Container Rack x 2	1000920

DIMENSIONS

SYPP Head 1000915

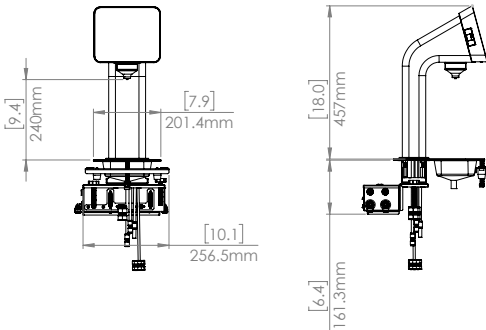

SYPP Pump Box 1000910

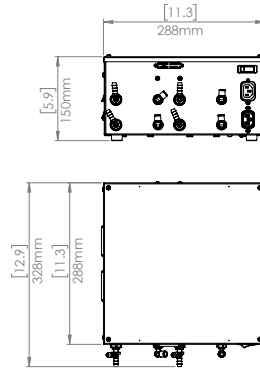

OPTIONAL ADD ONS


SYPP 4 CONTAINER RACK
1000920

CHILLED/SPARKLING BEVERAGE:

FRIIA CHILLER/
CARBONATOR
1000052/1000053

HOT BEVERAGE:

MIX UC3
1000800



14d x 13.4w x 13.3h

SPECS

PRODUCT INFO		SIZE		PLUMBING, ELECTRICAL AND TECHNICAL SPECS			
NAME ORDER CODE	DIMS (D X W X H inches)	TAP TO TRAY (H)	PLUMBING	ELECTRICAL MAINS		MAX POWER	DRAIN REQ'D
SYPP Head 1000915	14.6 x 10.1 x 24.4* (18 h over counter) *(overall size including tubing, brackets flow meter box etc)	9.4	Fit a push-fit 3/8" on cold water line. Water inlet pressure (min - max) - .01 - .05 MPa (14.5 - 70 psi)	Font powered by pump box			Y
SYPP Pump Box 1000910	12.9 x 11.3 x 5.9	-	-	BS1363 (IRL & UK), CEE7 (EU), NEMA NEMA 5-15P (US) plug to C13 IEC	120 -230V 50/60Hz 150W	150W per box	-

SYPP CAN DISPENSE:

Syrups (up to honey)	✓	Purees	✗
Alt Milks	✓	Dairy Milk	✗
Juice	✓		

COMPATIBLE WITH:

Non pressurised vessels,
SYPP Containers, BIBs, Tetra-packs,
Bottles, Urns.

*8 syrups require additional pump box

A large, industrial-style cold brew coffee machine is the central focus. It has a black main body with two handles and a stainless steel top section. A digital display on the top shows "DISPENSE CYCLE COMPLETE" and "Esc". To the right of the machine is a tall, stainless steel faucet. The machine sits on a wooden surface against a dark blue background.

COLD BREW/ CONCENTRATE

COLDBRU


The quickest, easiest, most consistent way to brew ready-to-drink or concentrate coffee.

- > Average 19% extraction and 4% TDS (up to 30% better yield than leading competitor)
- > Easy to clean with no paper filters
- > Average brew time of 3 hours
- > Input and save up to 3 recipes for ease and consistency

COLDBRU 1001950US



DIMENSIONS

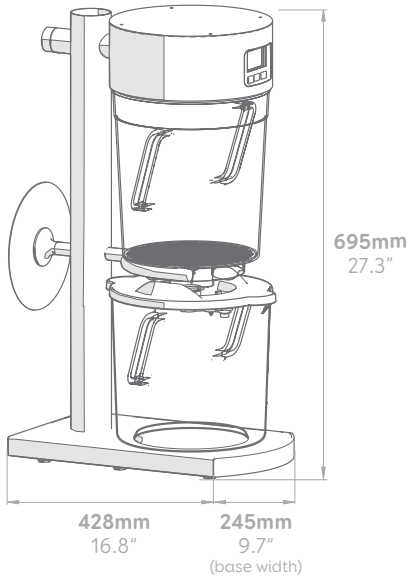

SPECS

NAME ORDER CODE	DIMS INCL. HANDLES (D x W x H inches)	PLUMBING REQS	POWER REQS	NEMA	WEIGHT
ColdBRU 1001950US	16.8 x 12.7 x 27.3	1/4" Push-fit	120V	5-15p	21.7lbs

PACKAGING

NAME ORDER CODE	PACKAGING DIMS (D x W x H inches)	PACKED WEIGHT	QTY / PALLET
ColdBRU 1001950US	20 x 16 x 36	27lbs	6



COMPATIBLE WITH:

Compatible with POUR'D for dispense

MILKPAL

STEAMLESS MILK SYSTEM



Settings



Hot



Cold




Regular



MILKPAL

Consistent hot and cold milk foam without steam

- > Smooth and creamy texture
- > Precise temperature control
- > Continuous brewing
- > Automated cleaning

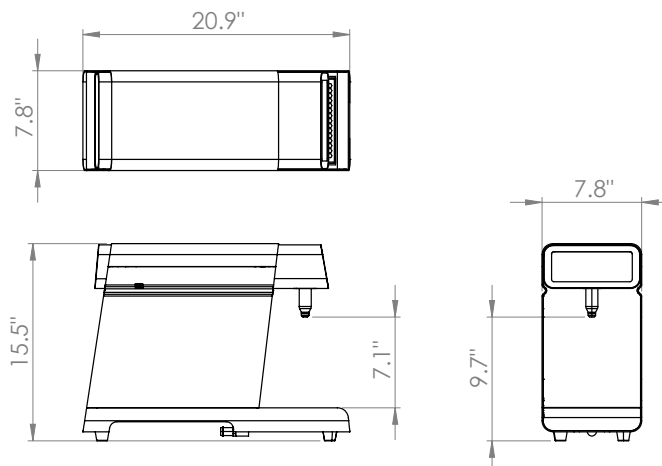



SPECS

NAME ORDER CODE	DIMENSIONS (D x W x H inches)	SPOUT TO TRAY (H inches)	SERVINGS/ HR	POWER @ 110V	PLUMBING REQS	WEIGHT	DRAIN REQ'D
MILKPAL 1001090US	21 x 7.6 x 15.2	7	120 (6oz)	12amp	1/4" push-fit 1 1/2" waste	66lbs	Y

PACKAGING

NAME ORDER CODE	DIMENSIONS (L x W x H inches)	PACKED WEIGHT	QTY / PALLET
MILKPAL 1001090US	28 x 22 x 12	77lbs*	8

*Ships on pallet

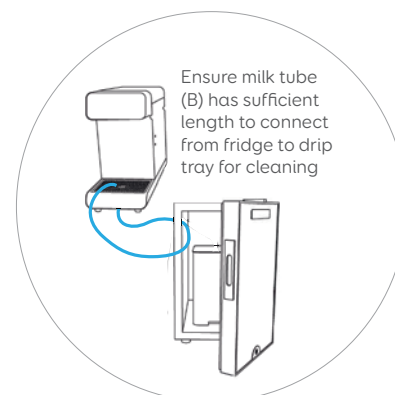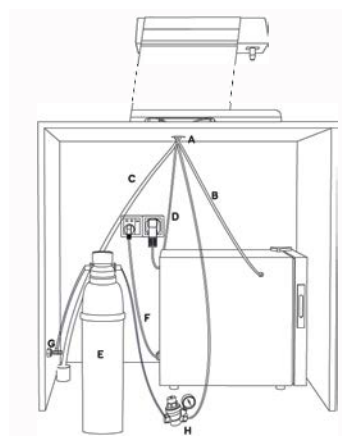

FRIDGE NOT INCLUDED.

HOT/COLD/
SPARKLING/
WATER



FRIIA C & FRIIA C HANDS-FREE

A stylish, flexible undercounter cold water system for hotels, cafés, or offices.

- > Two font heights available
- > 7.9-11.8 GALs/hr



COMPLETE BUNDLE ORDER CODE



FRIIA C	5001860US
FRIIA C Tall	5001863US
FRIIA C Hands-free Tall	5000857US

1B UNA FONT 1000859



1B UNA FONT TALL 1000858




FRIIA C HANDS FREE TALL 1000857



CHILLER 1001053US



SYSTEM SET-UP



CHILLER SPECS

PRODUCT INFO	SIZE	PERFORMANCE SPECS		PLUMBING, ELECTRICAL AND TECHNICAL SPECS				
NAME ORDER CODE	DIMS (D X W X H in.)	GAL/HR	CUPS /HR	POWER @120v	PLUMBING REQS	COMPRESSOR POWER	CHARGE	REFRIGERANT
Chiller 1001053US	19.6 x 11.1 x 16.6	7.9-11.8 GALs/hr based on incoming water temp of 59°F and output water temp of 41-44°F	175-235 (ΔT = 18 °F)	180 W	3/8" Compression or 3/8" John Guest	1/8hp	70g	R290

A minimum operating pressure of >3 bar or 28 psi downstream of filter is required for optimum output l/min.

FONT SPECS

NAME ORDER CODE	DIMENSIONS INC. DRIP TRAY (D X W X H in.)	DIMENSIONS EXCL. DRIP TRAY (D X W X H in.)	TAP TO COUNTER (inches)	DRAIN REQ'D
1b Una Font 1000859	6.6 x 4.7 x 11.2	5.4 x 1.1 x 11.2	9.1	Y
1b Una Font Tall 1000858	6.6 x 4.7 x 13.5	5.4 x 1.1 x 13.5	11.4	
FRIIA C Hands-free Font 1000857			12	

PACKAGING

NAME	PACKAGING DIMENSIONS (L X W X H inches)	WEIGHT
Fonts (all)	11.4 x 22.4 x 8.4	4.4lbs
Chiller	15.7 x 23.6 x 22.8	69.4lbs



PLEASE NOTE

FRIIA components (font and chiller) are packed and shipped in individual boxes.

FRIIA CS

A stylish, flexible undercounter cold/sparkling water system for hotels, cafés, or offices.

> Two font heights available > 7.9-11.8 GALS/hr



COMPLETE BUNDLE ORDER CODE

FRIIA CS 5001862US
FRIIA CS Tall 5001865US

2B FONT 1000868




2B FONT TALL 1000869



CHILLER/ CARBONATOR 1001052US



SYSTEM SET-UP



CHILLER/CARBONATOR SPECS

PRODUCT INFO	SIZE	PERFORMANCE SPECS			PLUMBING, ELECTRICAL AND TECHNICAL SPECS			
NAME ORDER CODE	DIMS (D X W X H in.)	GAL/HR	CUPS /HR	POWER @120V	PLUMBING REQS	COMPRES- SOR POWER	CHARGE	REFRIGERANT
Chiller/ Carbonator 1001052US	19.6 x 11.1 x 16.6	7.9-11.8 GALS/hr based on incoming water temp of 59°F and output water temp of 41-44°F	175-235 (ΔT = 18 °F)	180 W	3/8" Compression or 3/8" John Guest	1/8hp	70g	R290

A minimum operating pressure of >3 bar or 28 psi downstream of filter is required for optimum output l/min.

FONT SPECS

NAME ORDER CODE	DIMENSIONS INC. DRIP TRAY (D X W X H in.)	DIMENSIONS EXCL. DRIP TRAY (D X W X H in.)	TAP TO COUNTER (inches)	DRAIN REQ'D
2b Font 1000868	6.6 x 4.7 x 11.2	5.4 x 1.1 x 11.2	9.7	Y
2b Font Tall 1000869	6.6 x 4.7 x 13.6	5.4 x 1.1 x 13.6	11.8	

PACKAGING

NAME	PACKAGING DIMENSIONS (L X W X H inches)	WEIGHT
Fonts (all)	11.4 x 22.4 x 8.4	4.4lbs
Chiller/Carbonator	15.7 x 23.6 x 22.8	69.4lbs

PLEASE NOTE

FRIIA components (font and chiller) are packed and shipped in individual boxes.



FRIIA HC

A stylish, flexible undercounter hot/cold water system for hotels, cafés, or offices.

> 0.8 or 2.1 GAL boiler option



COMPLETE BUNDLE ORDER CODE

FRIIA HC 220v	5002864US
FRIIA HC 110v	1001864US
FRIIA HC Plus	5002866US

2B FONT 1000868



CHILLER 1001053US



MIX UC3 110v - 1001880 220v - 1000880US




OR

MIX UC8 1000887US



SYSTEM SET-UP



CHILLER SPECS

PRODUCT INFO	SIZE	PERFORMANCE SPECS		PLUMBING, ELECTRICAL AND TECHNICAL SPECS				
NAME ORDER CODE	DIMS (D X W X H in.)	GAL/HR	CUPS /HR	POWER @120v	PLUMBING REQS	COMPRESSOR POWER	CHARGE	REFRIGERANT
Chiller 1001053US	19.6 x 11.1 x 16.6	7.9-11.8 GALS/hr based on incoming water temp of 59°F and output water temp of 41-44°F	175-235 (ΔT = 18 °F)	180 W	3/8" Compression or 3/8" John Guest	1/8hp	70g	R290

A minimum operating pressure of >3 bar or 28 psi downstream of filter is required for optimum output l/min.

BOILER SPECS

PRODUCT INFO	SIZE	PERFORMANCE SPECS			PLUMBING & ELECTRICAL REQS		
NAME ORDER CODE	DIMENSIONS (D X W X H inches)	IMMEDIATE DRAW OFF	GAL/HR	CUPS/HR	POWER	NEMA	PLUMBING REQS
MIX UC3 - 110v 1001880	15.1 x 8.2 x 17.4	0.8 GAL	3.6 GAL	75	1.4kW @ 110v	5-15p	3/8" Compression or 3/8" John Guest
MIX UC3 - 220v 1000880US			7.3 GAL	156	2.8kW @ 220v	L6-20P	
MIX UC8 - 220v 1000887US	15.1 x 8.2 x 24.2	2.1 GAL					

FONT SPECS

NAME ORDER CODE	DIMENSIONS INC. DRIP TRAY (D X W X H in.)	DIMENSIONS EXCL. DRIP TRAY (D X W X H in.)	TAP TO COUNTER (inches)	DRAIN REQ'D
2b Font 1000868	6.6 x 4.7 x 11.2	5.4 x 1.1 x 11.2	9.7	Y

PACKAGING

NAME	PACKAGING DIMENSIONS (L X W X H inches)	WEIGHT
Font	11.4 x 22.4 x 8.4	4.4lbs
Chiller	15.7 x 23.6 x 22.8	69.4lbs
MIX UC3 - 220v/110v	17.7 x 11.4 x 21.2	25lbs
MIX UC8 - 220v	17.7 x 11.4 x 27.5	30.8lbs

PLEASE NOTE

FRIIA components (font, boiler and chiller) are packed and shipped in individual boxes.

FRIIA HCS

A stylish, flexible undercounter water range for hotels, cafés, or offices.

> 0.8 or 2.1 GAL boiler option



COMPLETE BUNDLE ORDER CODE

FRIIA HCS 220v	5002865US
FRIIA HCS 110v	1001865US
FRIIA HCS Plus	5002867US

3B FONT 1000862



CHILLER/ CARBONATOR 1001052US



MIX UC3 110v – 1001880 220v – 1000880US




OR

MIX UC8 1000887US



SYSTEM SET-UP



CHILLER/CARBONATOR SPECS

PRODUCT INFO	SIZE	PERFORMANCE SPECS		PLUMBING, ELECTRICAL AND TECHNICAL SPECS				
NAME ORDER CODE	DIMS (D X W X H in.)	GAL/HR	CUPS /HR	POWER @120V	PLUMBING REQS	COMPRESSOR POWER	CHARGE	REFRIGERANT
Chiller/ Carbonator 1001052US	19.6 x 11.1 x 16.6	7.9-11.8 GALS/hr based on incoming water temp of 59°F and output water temp of 41-44°F	175-235 (ΔT = 18 °F)	180 W	3/8" Compression or 3/8" John Guest	1/8hp	70g	R290

A minimum operating pressure of > 3 bar or 28 psi downstream of filter is required for optimum output l/min.

BOILER SPECS

PRODUCT INFO	SIZE	PERFORMANCE SPECS			PLUMBING & ELECTRICAL REQs		
NAME ORDER CODE	DIMENSIONS (D X W X H inches)	IMMEDIATE DRAW OFF	GAL/HR	CUPS/HR	POWER	NEMA	PLUMBING REQs
MIX UC3 – 110v 1001880	15.1 x 8.2 x 17.4	0.8 GAL	3.6 GAL	75	1.4kW @ 110v	5-15p	3/8" Compression or 3/8" John Guest
MIX UC3 – 220v 1000880US			7.3 GAL	156	2.8kW @ 220v	L6-20P	
MIX UC8 – 220v 1000887US	15.1 x 8.2 x 24.2	2.1 GAL					

FONT SPECS

NAME ORDER CODE	DIMENSIONS INC. DRIP TRAY (D X W X H in.)	DIMENSIONS EXCL. DRIP TRAY (D X W X H in.)	TAP TO COUNTER (inches)	DRAIN REQ'D
3b Font 1000862	6.6 x 4.7 x 11.2	5.4 x 1.1 x 11.2	9.7	Y

PACKAGING

NAME	PACKAGING DIMENSIONS (L X W X H in.)	WEIGHT
Font	11.4 x 22.4 x 8.4	4.4lbs
Chiller/Carbonator	15.7 x 23.6 x 22.8	69.4lbs
MIX UC3 – 220v/110v	17.7 x 11.4 x 21.2	25lbs
MIX UC8 – 220v	17.7 x 11.4 x 27.5	30.8lbs

PLEASE NOTE

FRIIA components (font, boiler and chiller) are packed and shipped in individual boxes.


FRIIA CHILLER/ CARBONATOR

- > Cold and/or sparkling: 35-40 L/hour
 - External CO₂ required
 - Aluminium block cooling technology
- > Suitable for: Offices, Hotels, Transport, Institutions, Cafés

CHILLER/CARBONATOR 1001052US



SYSTEM SET-UP for Cold/Sparkling

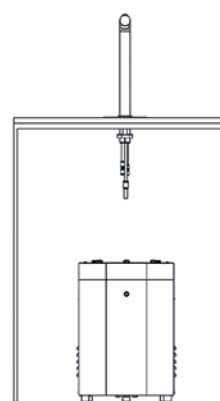

SPECS

PRODUCT INFO	SIZE	PERFORMANCE SPECS		PLUMBING, ELECTRICAL & TECHNICAL SPECS				
NAME ORDER CODE	DIMS (D X W X H inches)	GAL/HR	CUPS /HR	POWER @120v	PLUMBING REQS	COMP. POWER	CHARGE	REFRIGERANT
FRIIA Chiller 1001053US Carbonator 1000052	19.6 x 11.1 x 16.6	7.9-11.8 GALS/hr based on incoming water temp of 59°F and output water temp of 41-44°F	175-235 (ΔT = 10 °C)	180 W	3/8" Compression or 3/8" John Guest	1/8hp	70g	R290


A minimum operating pressure of 2 bar or 28 psi downstream of filter is required for optimum output l/min.

PACKAGING

NAME	DIMENSIONS (L X W X H inches)	WEIGHT
FRIIA Chiller/Carbonator	15.7 x 23.6 x 22.8	69.4lbs


FRIIA SYSTEM OVERVIEW

COUNTER CUT-OUTS

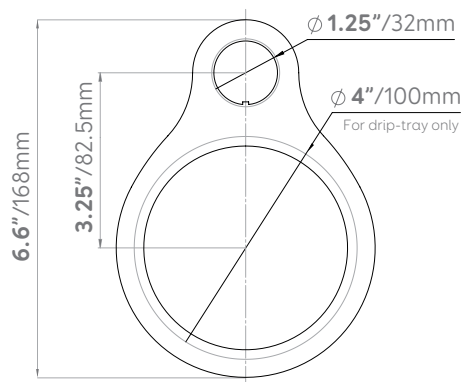

RADIUS OF MAXIMUM FRONT PLACEMENT

Standard
31.5" high
cabinet

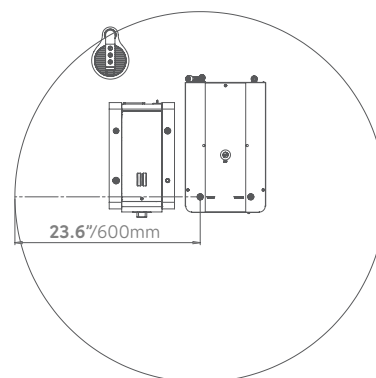




CABINET

Min: 31.5" (h) x 23.6" (w) x 23.6" (d) with 3.9" clearance around machines all sides

OPERATING ENVIRONMENT

Cannot exceed temperature of 95°F

VENTILATION

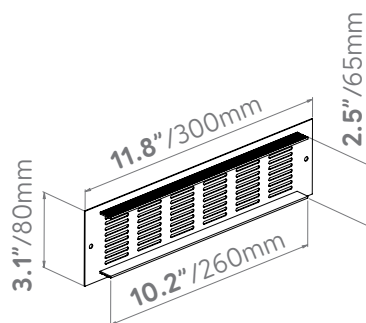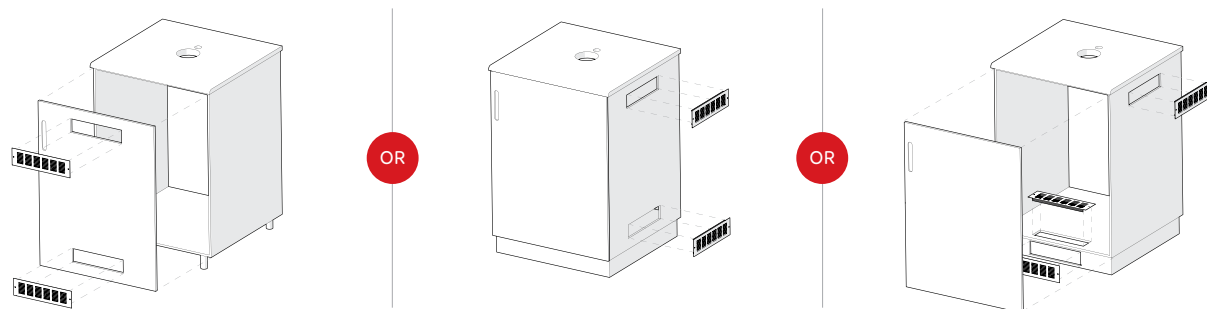


PLEASE NOTE

It is essential to allow for two ventilation points when installing FRIIA. Vents are not supplied. Where possible, we recommend removing the back of your cabinet.

FRIIA PERFORMANCE & MAINTENANCE

FRIIA OUTPUT VOLUME

Based on flow rate of 0.3 GAL/min and ambient temperature of 68-77°F. Chart indicates FRIIA chilling capacity based on incoming water temperature and desired output water temperature.

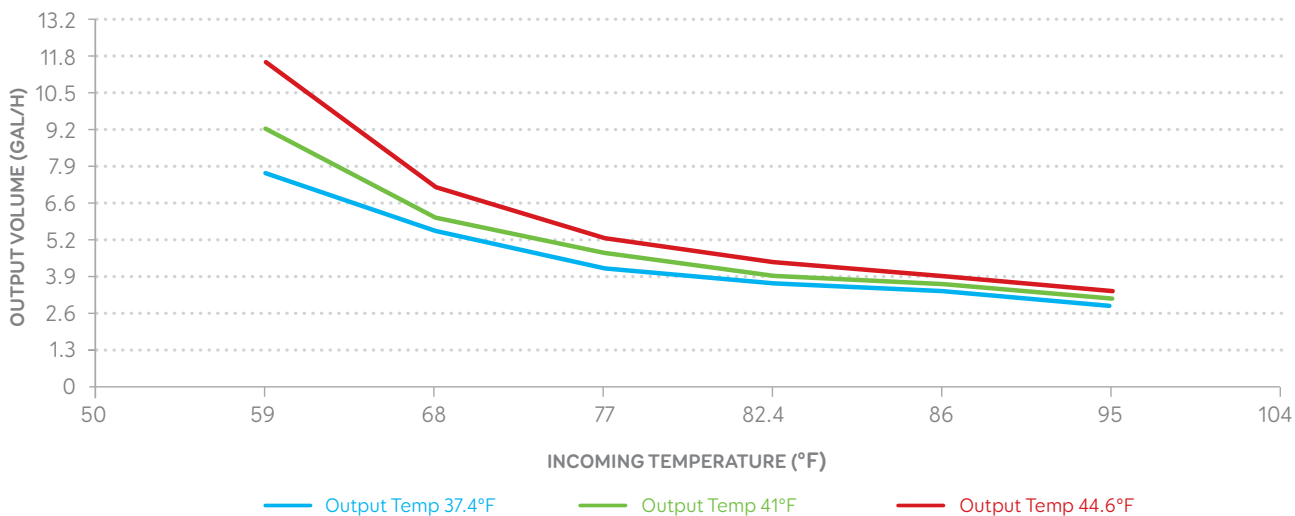

HOW TO CLEAN FRIIA

- > Wipe down front daily with non-abrasive cleaner.
- > Sanitize the chiller every 6 months, after a filter change or after a period of inactivity (more than 72 hours). Visit our YouTube channel for further instruction.

MAINTENANCE

- > FRIIA requires use of both a HOT (scale reducing filter if limescale is present) and COLD (carbon block for taste and odour) water filters for FRIIA. Please contact us for advice on the best water filter.
- > Descale the MIX boiler if scale is present in the water.

HOT WATER

UNDERCOUNTER BOILERS



MIX UNDERCOUNTER HOT WATER

Programmable for on-demand and accurate water delivery in three separate temperatures and volumes.

- > Up to 70% more energy-efficient
- > Compatible with 1 or 3 button space-saving countertop font
- > Dispense three volumes and three temperatures from one hot water boiler

MIX UC3

- 220v / 110v
1000880US / 1001880




MIX UC8

- 220v
1000887US



DIMENSIONS



SEE TABLE FOR
PRODUCT DIMENSIONS

SPECS

PRODUCT INFO	WATER TYPE	SIZE DIMS	PERFORMANCE SPECS			PLUMBING & ELECTRICAL REQS		
NAME ORDER CODE	ADJUSTABLE TEMP	DIMS (D x W x H in.)	IMMEDIATE DRAW OFF	GAL /HR	CUPS /HR	POWER	NEMA	PLUMBING REQS
MIX UC3 - 110v 1001880	Y	15.1 x 8.2 x 17.4	0.8 GAL	3.6 GAL	75	1.4kW @ 110v	5-15p	3/8" Compression or 3/8" John Guest
MIX UC3 - 220v 1000880US				7.3 GAL	156	2.8kW @ 220v	L6-20P	
MIX UC8 - 220v 1000887US		15.1 x 8.2 x 24.2	2.1 GAL					

PACKAGING

NAME ORDER CODE	PACKAGING DIMENSIONS (L x W x H inches)	PACKED WEIGHT	QTY / PALLET
1b Una Font 1000859	11.4 x 22.4 x 8.4	4.4lbs	30
MIX UC3 - 220v / 110v 1000880US / 1001880	17.7 x 11.4 x 21.2	25lbs	24
MIX UC8 - 220v 1000887US	17.7 x 11.4 x 27.5	30.8lbs	18

MIX UNDERCOUNTER HOT WATER WITH UNA FONT


> Space-saving countertop font

> Vacuum insulated tank for up to 70% more energy-efficiency


1B UNA FONT 1000859



DIMENSIONS



SYSTEM SET-UP



MIX UC3 - 220v / 110v 1000880US / 1001880



MIX UC8 - 220v 1000887US



OR

FONT SPECS

NAME ORDER CODE	DIMENSIONS INCL. DRIP TRAY	DIMENSIONS EXCL. DRIP TRAY (D x W x H inches)	TAP TO COUNTER (T inches)	DRAIN REQ'D
1b Una Font 1000859	6.6 x 4.7 x 11.2	5.4 x 1.1 x 11.2	9.1	Y

BOILER SPECS

PRODUCT INFO	WATER TYPE	SIZE DIMS	PERFORMANCE SPECS			PLUMBING & ELECTRICAL REQS		
NAME ORDER CODE	ADJUSTABLE TEMP	DIMS (D x W x H in.)	IMMEDIATE DRAW OFF	GAL /HR	CUPS /HR	POWER	NEMA	PLUMBING REQS
MIX UC3 - 110v 1001880	Y	15.1 x 8.2 x 17.4	0.8 GAL	3.6 GAL	75	1.4kW @ 110v	5-15p	3/8" Compression or 3/8" John Guest
MIX UC3 - 220v 1000880US				7.3 GAL	156	2.8kW @ 220v	L6-20P	
MIX UC8 - 220v 1000887US		15.1 x 8.2 x 24.2	2.1 GAL					

PACKAGING

NAME ORDER CODE	PACKAGING DIMENSIONS (L x W x H inches)	PACKED WEIGHT	QTY / PALLET
1b Una Font 1000859	11.4 x 22.4 x 8.4	4.4lbs	30
MIX UC3 - 220v / 110v 1000880US / 1001880	17.7 x 11.4 x 21.2	25lbs	24
MIX UC8 - 220v 1000887US	17.7 x 11.4 x 27.5	30.8lbs	18


MIX UNDERCOUNTER HOT WATER WITH 3B FONT

- > Space-saving countertop font
- > Vacuum insulated tank for up to 70% more energy-efficiency
- > Dispense three volumes and three temperatures from one boiler


3B MIX FONT 1000879



DIMENSIONS



SYSTEM SET-UP



MIX UC3 - 220v / 110v 1000880US / 1001880



OR

MIX UC8 - 220v 1000887US



FONT SPECS

NAME ORDER CODE	DIMENSIONS INCL. DRIP TRAY (D x W x H inches)	DIMENSIONS EXCL. DRIP TRAY (D x W x H inches)	TAP TO COUNTER (T inches)	DRAIN REQ'D
3b MIX Font 1000879	6.6 x 4.7 x 11.2	5.4 x 1.1 x 11.2	9.7	Y

BOILER SPECS

PRODUCT INFO	WATER TYPE	SIZE DIMENSIONS	PERFORMANCE SPECS			PLUMBING & ELECTRICAL REQS		
NAME ORDER CODE	ADJUSTABLE TEMP	DIMENSIONS (D x W x H inches)	IMMEDIATE DRAW OFF	GAL /HR	CUPS /HR	POWER	NEMA	PLUMBING REQS
MIX UC3 - 110v 1001880	Y	15.1 x 8.2 x 17.4	0.8 GAL	3.6 GAL	75	1.4kW @ 110v	5-15p	3/8" Compression or 3/8" John Guest
MIX UC3 - 220v 1000880US				7.3 GAL	156	2.8kW @ 220v	L6-20P	
MIX UC8 - 220v 1000887US		15.1 x 8.2 x 24.2	2.1 GAL					

PACKAGING

NAME ORDER CODE	PACKAGING DIMENSIONS (L x W x H inches)	PACKED WEIGHT	QTY / PALLET
3b MIX Font 1000879	11.4 x 22.4 x 8.4	4.4lbs	30
MIX UC3 - 220v / 110v 1000880US / 1001880	17.7 x 11.4 x 21.2	25lbs	24
MIX UC8 - 220v 1000887US	17.7 x 11.4 x 27.5	30.8lbs	18



HOT WATER

COUNTERTOP PUSH BUTTON



MIX COUNTERTOP HOT WATER - PUSH BUTTON

Programmable for on-demand and accurate water delivery in three separate temperatures and volumes.

- > 0.8 or 2.1 gallon options
- > Up to 70% more energy-efficient
- > Removable drip tray
- > 7.5 gallons output per hour
- > 156 cups per hour


MIX PB3 - 220v / 110v
1001870US / 1000870US



MIX PB8
1000875US



DIMENSIONS

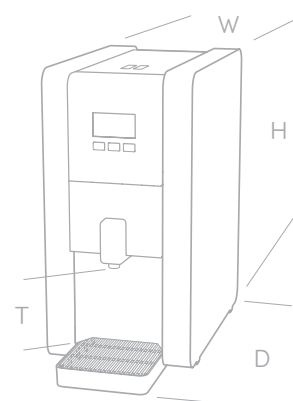

SEE TABLE FOR
PRODUCT DIMENSIONS

SPECS

NAME ORDER CODE	POWER	IMMEDIATE DRAW OFF	DIMENSIONS (D x W x H inches)	TAP TO COUNTER (T inches)	CUPS / HR	NEMA	PLUMBING REQS
MIX PB3 - 110v 1001870US	1.4kW @ 110v	0.8 GAL	17 x 8.2 x 16.5	5	75	5-15p	3/8" Compression or 3/8" John Guest
MIX PB3 - 220v 1000870US	2.8kW @ 230V				2.1 GAL	17 x 8.2 x 23.3	
MIX PB8 - 220v 1000875US							

PACKAGING

NAME ORDER CODE	PACKED WEIGHT	PACKAGING DIMENSIONS (L x W x H inches)	QTY / PALLET
MIX PB3 - 110v 1001870US	25lb	17.7 x 11.4 x 21.2	24
MIX PB3 - 220v 1000870US			
MIX PB8 - 220v 1000875US	30.8lb	17.7 x 11.4 x 27.5	18

HOT WATER COUNTERTOP TAP



MT COUNTERTOP HOT WATER

Energy-efficient & reliable countertop water boilers with sleek LED temperature display.

- > Insulated tank for minimal energy-loss
- > 1, 2 or 6.6 GAL options
- > LED temperature display
- > Removeable drip tray

MT4 - 220v / 110v
1000762US / 1001762US



MT8 - 220v / 110v
1000763US / 1001763US



MT25 - 220v / 110v
1000765US / 1001765US



SPECS

NAME ORDER CODE	DIMENSIONS (D x W x H inches)	TAP TO DRIP TRAY (T inches)	TAP TO COUNTER (C inches)	IMMEDIATE DRAW OFF	GAL /HR	CUPS /HR	POWER REQS	NEMA	PLUMBING REQS
MT4 - 110v 1001762US	17 x 7.9 x 18.2	9.3	10	1 GAL	3.8	75	1.4kW	5-15 plug	3/8" Compression or 3/8" John Guest
MT4 - 220v 1000762US					7.3	156	2.8kW	L6-20P plug	
MT8 - 110v 1001763US	17 x 7.9 x 23			2.1 GAL	3.8	75	1.4kW	5-15 plug	
MT8 - 220v 1000763US					7.3	156	2.8kW	L6-20P plug	
MT25 - 110v 1001765US	22.4 × 10.6 × 27.1			6.6 GAL	3.8	75	1.4kW	5-15 plug	
MT25 - 220v 1000765US					7.3	156	2.8kW	L6-20P plug	

PACKAGING

NAME ORDER CODE		PACKAGING DIMENSIONS (L x W x H inches)	PACKED WEIGHT	QTY / PALLET
MT4 - 110v 1001762US	MT4 - 220v 1000762US	19.8 x 10.2 x 21.6	20lbs	24
MT8 - 110v 1001763US	MT8 - 220v 1000763US	20 x 10.2 x 25.7	24lbs	
MT25 - 110v 1001765US	MT25 - 220v 1000765US	24.4 x 12.9 x 29.5	46.2lbs	10

ASSOCIATED PRODUCT (SOLD SEPARATELY)



Hands-Free Urn Tap Adapter
2100500



COFFEE

JET

Precise, programmable batch brewer for higher volume requirements.

- > Single (1.5 gallon) or Twin (3 gallon) options
- > Pre-set recipe and volume options
- > Basket safety lock during brewing
- > Operator friendly and easy-to-use
- > Vacuum insulated urn for energy-efficiency and temperature retention
- > Two power options


JET 6 2.8KW 1000851US
JET 6 5.6KW 1000850US



JET TWIN
1000855US



DIMENSIONS

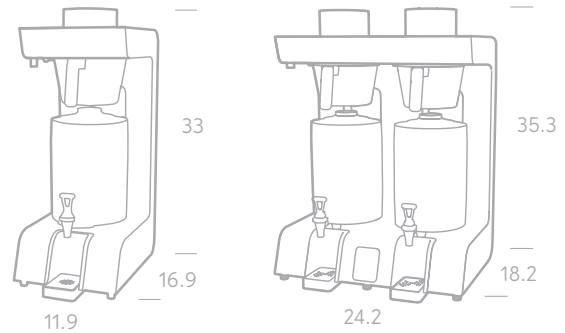

SPECS

PRODUCT INFO	PERFORMANCE SPECS	SIZE	PLUMBING & ELECTRICAL REQS			PACKAGING		
NAME ORDER CODE	FULL BREW	DIMENSIONS (D x W x H inches)	POWER @ 230V	PLUMBING REQS	NEMA	PACKED WEIGHT	PACKAGING DIMENSIONS (L x W x H inches)	QTY / PALLET
Jet 6 2.8kW 1000851US	1.5 GAL	16.9 x 11.9 x 33	2.8kW	3/8" Compression or 3/8" John Guest	L6-20P	52.9lb	19.6 x 15.7 x 35.4	6
Jet 6 5.6kW 1000850US			5.6kW		L6-30P			
Jet Twin 1000855US	1.5 GAL (per urn)	18.2 x 24.2 x 35.3				106lb	19.6 x 27.9 x 36.2	2

ASSOCIATED PRODUCTS & ACCESSORIES (SOLD SEPARATELY)

JET URN
1700204



REQUIRED

JET GRINDER
1000891



HANDS-FREE URN TAP ADAPTER
2100500

OPTIONAL



PRODUCT INFO		SIZE	PACKAGING		
NAME	ORDER CODE	DIMENSIONS (D x W x H inches)	PACKED WEIGHT	PACKAGING DIMENSIONS (L x W x H inches)	QTY / PALLET
Jet Grinder	1000891	14.5 x 7.4 x 22	55lbs	23 x 12 x 32	12
Jet Urn	1700204	16.5 x 9.6 x 22.4	16lbs	26 x 13 x 18	16
Hands-Free Urn Tap Adapter	2100500	—	—	—	—

SP9

Single-serve undercounter precision brewer.

SP9 HEAD

1000830
1000830W




SP9 BOILER

1000831US



DIMENSIONS

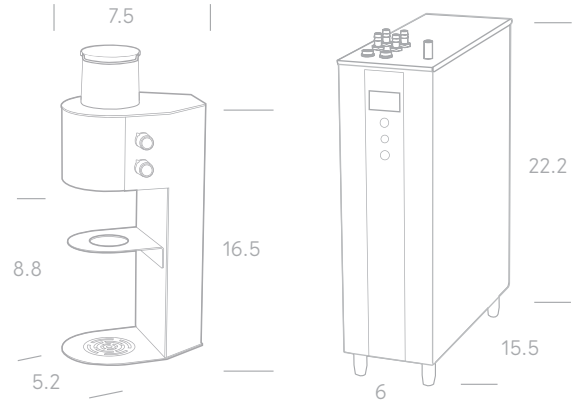

SPECS

NAME ORDER CODE	POWER @ 230V	IMMEDIATE DRAW OFF	CUPS PER HOUR	HEAD DIMENSIONS (D x W x H inches)	UNDERCOUNTER BOILER DIMENSIONS (D x W x H inches)	NEMA	TAP TO COUNTER (inches)	PLUMBING REQS				
SP9 Single 1000832US	2.4kW	1 GAL	25	7.5 x 5.2 x 16.5	15.5 x 6 x 22.2	L6-20P	8.8	3/8” Compression or 3/8” John Guest				
SP9 Single (White) 1000832WUS												
SP9 Twin 1000833US			50	7.5 x 5.2 x 16.5 (per head)								
SP9 Twin (White) 1000833WUS												

PACKAGING

NAME ORDER CODE	PACKED WEIGHT	PACKAGING DIMENSIONS (L x W x H inches)	QTY / PALLET
SP9 Single 1000832US	14lb (head) + 26lb (boiler) Total: 40lb (2 boxes)	23 x 12 x 9 (head) 20 x 10.5 x 28 (boiler)	12
SP9 Single (White) 1000832WUS			
SP9 Twin 1000833US	14lb (per head) + 26lb (boiler) Total: 54lb (3 boxes)	23 x 12 x 9 (head x2) 20 x 11 x 28 (boiler)	
SP9 Twin (White) 1000833WUS			

GOOD TO KNOW

SP9 Single / SP9 Single White [1000832US / 1000832WUS] is packed and shipped in two boxes.

SP9 Twin / SP9 Twin White [1000833US / 1000833WUS] is packed and shipped in three boxes.



WE CARE ABOUT OUR CUSTOMERS

Contact us for any advice you require – we're here to help

Phone +1 206 641 7692

Web www.marcobeveragesystems.com/us

Sales / Spares ussales@marco.ie

Tech / Customer Support us.support@marcobeveragesystems.com

Accounts usaccounts@marcobeveragesystems.com

For more product info, FAQs and troubleshooting tips visit our website: **www.marcobeveragesystems.com**

