

MIX FONTS WITH UNDERCOUNTER WATER BOILERS

MIX FONTS WITH UNDERCOUNTER WATER BOILERS

| MIX 3 BUTTON FONT 1000879 | MIX 1 BUTTON FONT 1000878 | DIMENSIONS |
|--|---|---|
|  |  |  |
| <ul style="list-style-type: none"> 3 or 8 litre options Vacuum insulated tank for up to 70% more energy-efficiency Autofill/plumbed | <ul style="list-style-type: none"> Counter cutouts required 28 litre output per hour 156 cups (180ml) per hour | |

ASSOCIATED PRODUCTS (SOLD SEPARATELY)

| REQUIRED | | OPTIONAL |
|---|---|--|
| MIX UC3 1000880 | MIX UC8 1000887 | DRIP TRAY 2300268 |
|  |  |  |

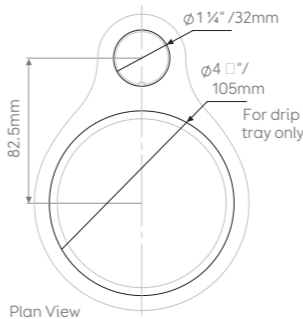
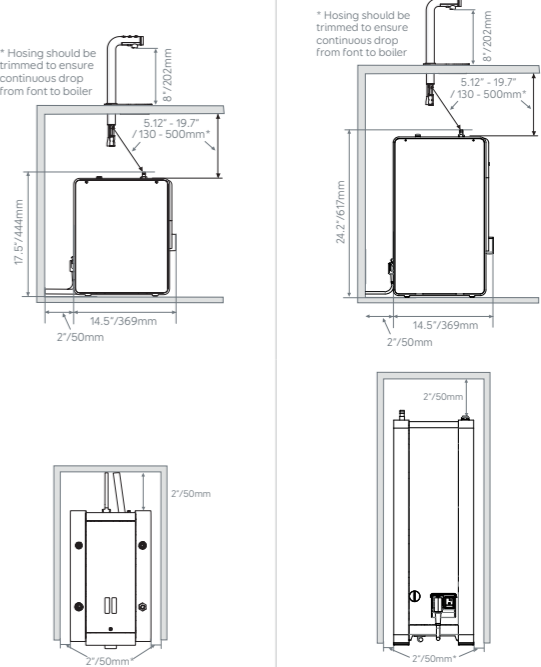
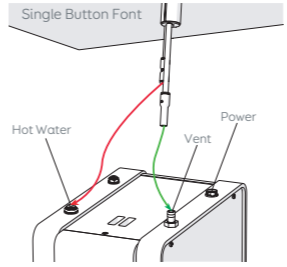
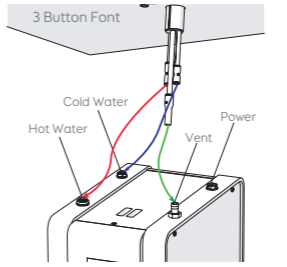
BOILERS

| NAME ORDER CODE | POWER @ 230V | IMMEDIATE DRAW OFF | DIMENSIONS (D x W x H mm) | PLUMBING REQS |
|--------------------|-----------------|-----------------------|------------------------------|------------------|
| MIX UC3 1000880 | 2.8kW | 3 L | 385 x 210 x 440 | 3/4" BSP |
| MIX UC8 1000887 | 2.8kW | 8 L | 385 x 210 x 610 | 3/4" BSP |

FONTS & ACCESSORIES

| NAME ORDER CODE | DIMENSIONS (D x W x H mm) | TAP TO TRAY (T mm) |
|------------------------------|------------------------------|-----------------------|
| MIX 1 Button Font 1000878 | 132 x 38 x 242 | 200 |
| MIX 3 Button Font 1000879 | 132 x 38 x 242 | 200 |
| MIX Drip Tray 2300268 | 170 x 125 x 35 | — |

STYLISH, SPACE-SAVING FONT WITH PROGRAMMABLE UNDERCOUNTER BOILER TO DISPENSE THREE TEMPERATURES, THREE VOLUMES IN AN INSTANT.

| MIX 1 OR 3 BUTTON FONTS WITH MIX UC3/UC8 | |
|---|--|
| COUNTER CUTOUT | MIX 3 BUTTON FONT 1000879 MIX 1 BUTTON FONT 1000878 |
| | MIX UC3 1000880 MIX UC8 1000887 |
|  |  <p>* Hosing should be trimmed to ensure continuous drop from font to boiler.</p> <p>* Hosing should be trimmed to ensure continuous drop from font to boiler.</p> <p>* Required for ventilation if the machine is installed in an enclosed cabinet.</p> <p>* Required for ventilation if the machine is installed in an enclosed cabinet.</p> |
|   | <p>ELECTRICAL INSTALLATION PROCEDURE</p> <p>When installing the machine, always observe the local regulations and standards. The standard machine is supplied with a UK 3-pin plug. For EU models a 2-pin CEE-7 plug will be supplied. US models will be supplied with the suitable plug. A suitable mains power supply socket should be available within easy access of the appliance so that it can be disconnected easily after install.</p> <p>PLUMBING INSTALLATION PROCEDURE</p> <ul style="list-style-type: none"> Ensure that the equipment is installed according to local plumbing & water regulations. Mains water pressure required (limits): 14.5 - 145psi (100 - 1000kPa, 0.1 - 1MPa). Requires inline water filter within your water specifications. The machine is supplied with a 3/4" BSP connection. Turn on the water to flush any impurities, dust etc from the inlet hose and water pipe. Allow several litres through. Especially for new installations. Connect the hose to the inlet valve of the boiler. Make sure a sealing washer is fitted. Turn on water and check for leaks. <p>OPERATING BOILER FOR THE FIRST TIME</p> <ul style="list-style-type: none"> Check that all installation procedures have been carried out. Ensure water valve is on. Plug boiler into suitable socket. Turn on the power switch. The "Wait" progress circle will be visible on the screen and the machine will fill to a safe level, above the elements, before heating. The "Ready" tick will come up on screen when the machine is full and up to normal operating temperature (approx. 10/20 mins.). The boiler is now ready for use - the display will show the button settings and the "Ready" status tick. The Boiler may now be used to dispense Hot Water to the preset factory settings. <p>NOTE: Because the boiler is electronically controlled no priming is necessary. The element cannot switch on until a safe level of water is reached.</p> |